


# Lifting Beams




## Model 21 - Twin Hoist Rotating Lifting Beams

A specially designed lifting and rotation beam which allows the use of two cranes or two hoists to horizontally rotate a load. A position locking feature allows the user the flexibility of holding the load rotation at a designated position. Available with motorized rotation.

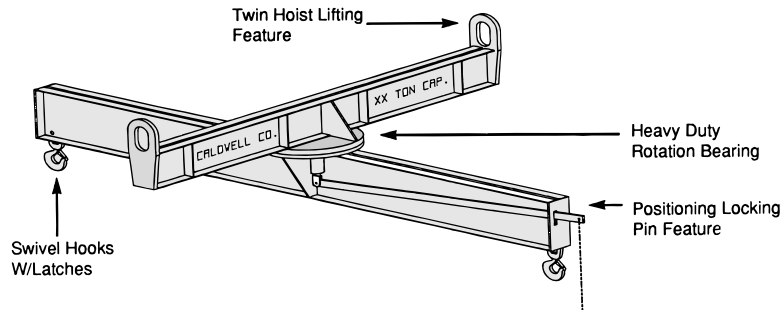


### PRODUCT FEATURES:

- Wide Range of Sizes & Capacities Available.
- Beam Lengths (Upper & Lower) Maximum 20 Feet.
- Designed and manufactured to ASME B30.20.




#### OPTION A

**TWIN HOOKS.**  
Used in conjunction with basket hitch slings.




#### OPTION B

**J HOOKS.**  
Generally required to lift paper rolls or similar application. (Use Model 23 Application Information Required, page A.26)



#### OPTION C

**MOTORIZED ROTATION.**  
Allows remote positioning of a load.




#### OPTION D

**LOWER HEAD ROOM BAILS.**  
Utilized when headroom must be held to a minimum.

## Model 28 - Chlorine Cylinder Lifting Beam

Designed to efficiently handle chlorine gas cylinders. Standard size as determined by Chlorine Institute is length of 80-3/4" to 82-1/4". Special low headroom modification is available.

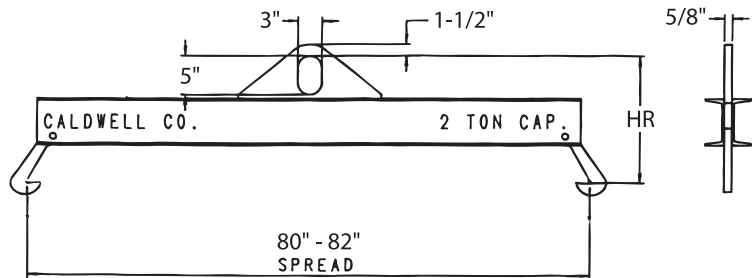

### SPECIFICATIONS

MODEL NO.	CAPACITY IN TONS	HEADROOM (HR)	WEIGHT (LBS)
28-2-80/82	2	13-1/2" - 10-1/2"	105